Brian R. Bloom
Architect
350 S. Milliken Ave., Ste G, Ontario, CA 91761-7850
(909) 390-7209 FAX (909) 390-7509
ARCHITECTURE AND PLANNING

CONSULTANT

DOOR SCHEDULE - FIRST FLOOR

DOOR #	LOCATION	TYPE	WIDTH	HEIGHT	THICKNESS	UNDERCUT	DOOR MATERIAL	DOOR FINISH	FRAME MATERIAL	FRAME FINISH	HEAD DET/SHT	JAMB DET/SHT	THRESH DET/SHT	HARDWARE	LABEL	REMARKS
100	MENS RESTROOM	C	3'-0"	7'-0"	1 3/4"	-	WD	STV	WD	STV	3 / A6.0	3 / A6.0	- / -	2	-	-
101	CLOSET	A2	2'-8"	7'-0"	1 3/4"	-	WD	STV	WD	STV	4 / A6.0	4 / A6.0	- / -	4	-	-
102	WOMENS RESTROOM	C	3'-0"	7'-0"	1 3/4"	-	WD	STV	WD	STV	3 / A6.0	3 / A6.0	- / -	2	-	-
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-

DOOR SCHEDULE - SECOND FLOOR

DOOR #	LOCATION	TYPE	WIDTH	HEIGHT	THICKNESS	UNDERCUT	DOOR MATERIAL	DOOR FINISH	FRAME MATERIAL	FRAME FINISH	HEAD DET/SHT	JAMB DET/SHT	THRESH DET/SHT	HARDWARE	LABEL	REMARKS
200	OFFICE	B	3'-0"	7'-0"	1 3/4"	-	WD	STV	WD	STV	4 / A6.0	4 / A6.0	- / -	1	-	-
201	OFFICE	B	3'-0"	7'-0"	1 3/4"	-	WD	STV	WD	STV	1 / A6.0	1 / A6.0	- / -	1	-	-
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-

DOOR SCHEDULE - THIRD FLOOR

DOOR #	LOCATION	TYPE	WIDTH	HEIGHT	THICKNESS	UNDERCUT	DOOR MATERIAL	DOOR FINISH	FRAME MATERIAL	FRAME FINISH	HEAD DET/SHT	JAMB DET/SHT	THRESH DET/SHT	HARDWARE	LABEL	REMARKS
300	OFFICE	B	3'-0"	7'-0"	1 3/4"	-	WD	STV	WD	STV	3 / A6.0	3 / A6.0	- / -	1	-	-
301	JANITOR	A1	3'-0"	7'-0"	1 3/4"	1"	WD	STV	WD	STV	4 / A6.0	4 / A6.0	- / -	4	-	UNDERCUT REQUIRED
302	RESTROOM	C	3'-0"	7'-0"	1 3/4"	1"	WD	STV	WD	STV	7 / A6.0	7 / A6.0	- / -	3	-	UNDERCUT REQUIRED HINGE JAMB @ (E) WALL FRAMING
-		-	-	-	-	-	-	-	-	-	- / -	- / -	- / -	-	-	-

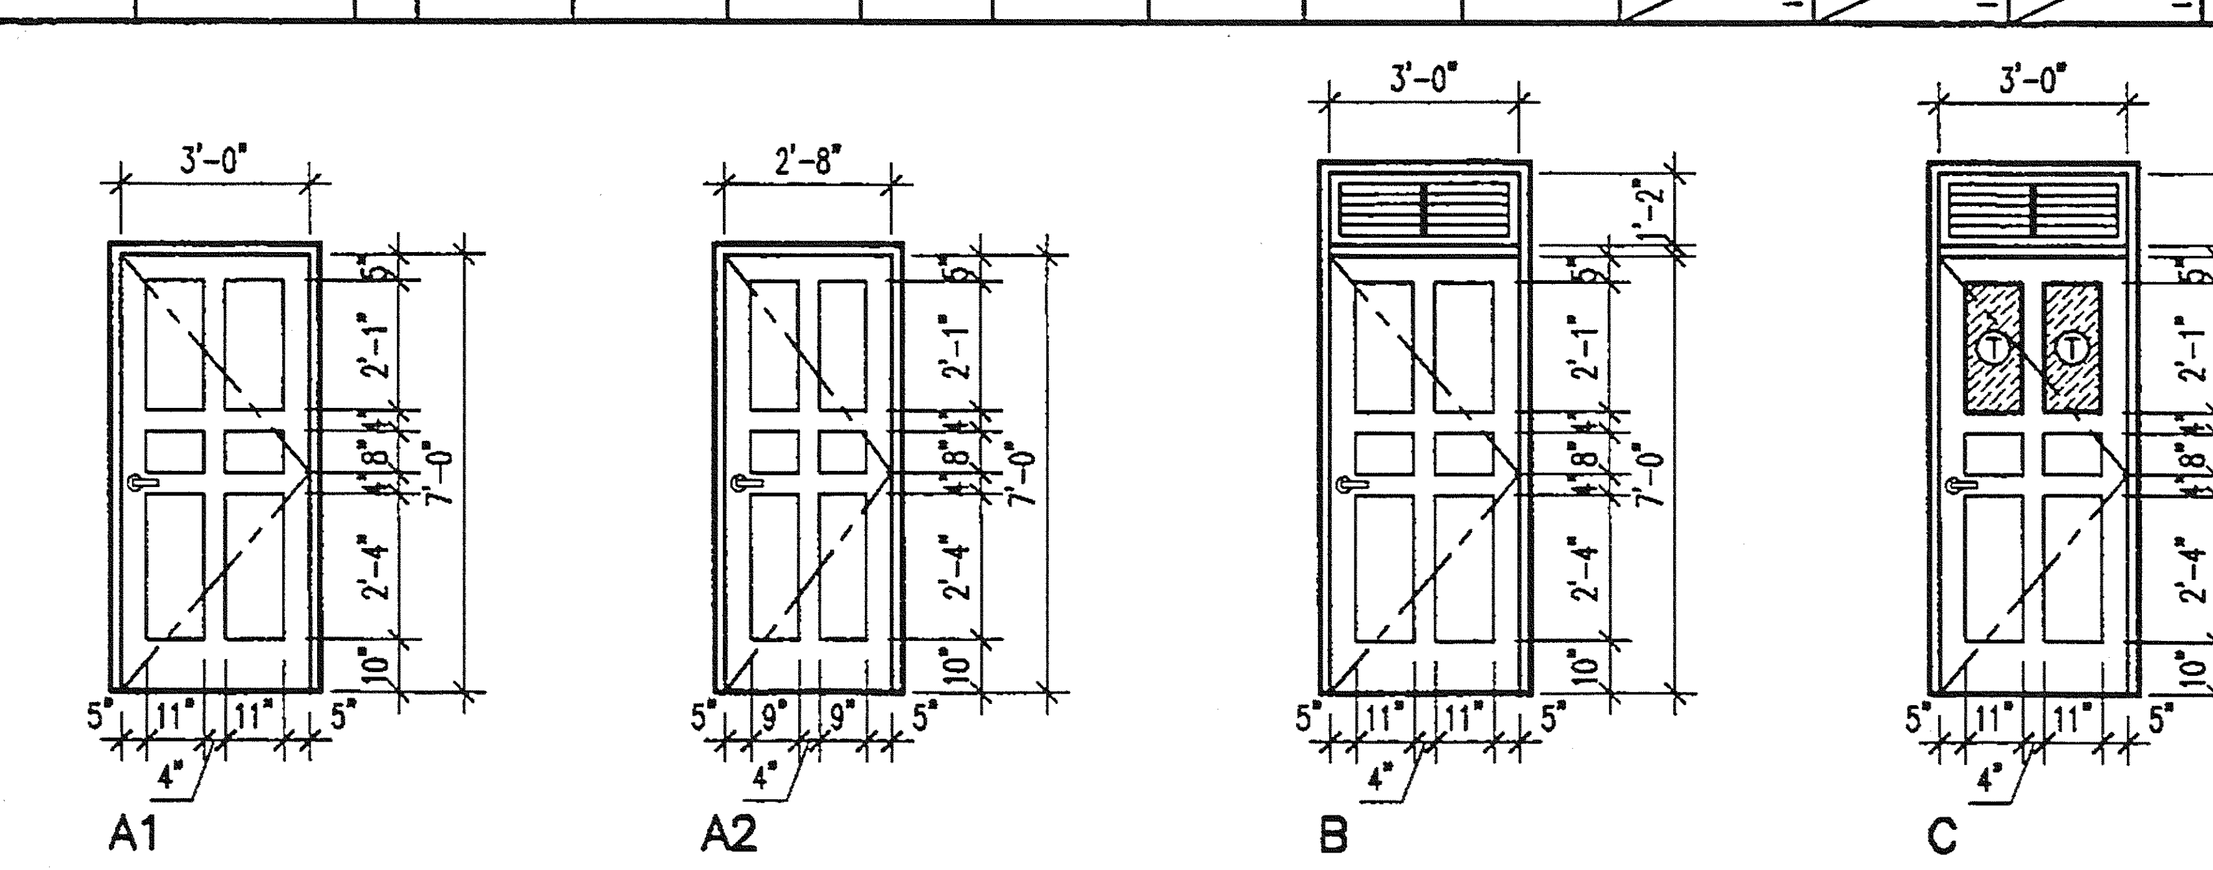

NOTE: NEW WOOD PANEL DOORS AND TRANSOM PANELS TO MATCH EXISTING HISTORIC DOORS. FIELD VERIFY DIMENSIONS AND PROFILES OF THE EXISTING DOORS.

AL ALUMINUM
BR ANODIZED ALUMINUM BRONZE FINISH
CLR CLEAR AND/OR STAINED NATURAL WOOD
DG DUAL GLAZING
(E) EXISTING
F FIXED GLAZING
FF FACTORY FINISH
GL GLASS
HG HORIZONTAL GLIDER
HM HOLLOW METAL
LVR LOUVER
MTL METAL
PTD PAINTED
SC SOLID CORE
SH SINGLE HUNG
STV STAINED AND VARNISHED
(T) TEMPERED OBSCURE GLASS
WD WOOD
WG WIRE GLASS

DOOR SCHEDULE NOTES

1. ALL NEW DOOR LOCKSETS TO BE CORBIN RUSSWIN. LOCKSET TYPE TO BE UNIT LOCKS, EXTRA HEAVY DUTY, 2 3/4" BACKSET WITH INTERCHANGABLE CORES.
2. REMAINDER OF DOOR HARWARE TO BE AS SCHEDULED IN HARDWARE SETS.
3. RETURN HARWARE FROM DOORS SCHEDULED TO BE REMOVED TO THE OWNER.
4. PROVIDE THRESHOLDS AT ALL TRANSITIONS IN FLOORING MATERIALS.
5. EXIT DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE.
6. ALL KEYING TO BE COORDINATED w/OWNER'S LOCKSMITH.

HW-1 OFFICE DOORS (OFFICE FUNCTION)
3 EA HINGE STANLEY CB 1900 4-1/2 x 4-1/2 FINISH 640 STEEL
1 EA LOCKSET CORBIN RUSSWIN ML2051 - TSL FINISH 613
VINEYARD SERIES - TUSCANY LEVER AND ESCOUTCHEON
1 EA FLOOR STOP GLYNN-JOHNSON FB 15/16R FINISH 613
1 EA THRESHOLD PEMKO 172B DARK BRONZE ANODIZED
1 EA DOOR BOTTOM PEMKO 222DV DARK BRONZE ANODIZED
3 EA SILENCERS GLYNN-JOHNSON GJ65 FINISH BRONZE

HW-2 RESTROOM DOORS (PASSAGE FUNCTION)
3 EA HINGE STANLEY CB 1900 4-1/2 x 4-1/2 FINISH 640 STEEL
1 EA LOCKSET CORBIN RUSSWIN ML2010 - TSL FINISH 613
VINEYARD SERIES - TUSCANY LEVER AND ESCOUTCHEON
1 EA FLOOR STOP GLYNN-JOHNSON FB 15/16R FINISH 613
1 EA THRESHOLD MARBLE
3 EA SILENCERS GLYNN-JOHNSON GJ65 FINISH BRONZE

HW-3 TOILET ROOM DOORS (PRIVACY FUNCTION)
3 EA HINGE STANLEY CB 1900 4-1/2 x 4-1/2 FINISH 640 STEEL
1 EA LOCKSET CORBIN RUSSWIN ML2069 - TSL FINISH 613
VINEYARD SERIES - TUSCANY LEVER AND ESCOUTCHEON
1 EA FLOOR STOP GLYNN-JOHNSON FB 15/16R FINISH 613
1 EA THRESHOLD MARBLE
3 EA SILENCERS GLYNN-JOHNSON GJ65 FINISH BRONZE

HW-4 JANITOR/CLOSET DOORS (STOREROOM FUNCTION)
3 EA HINGE STANLEY CB 1900 4-1/2 x 4-1/2 FINISH 640 STEEL
1 EA LOCKSET CORBIN RUSSWIN ML2057 - TSL FINISH 613
VINEYARD SERIES - TUSCANY LEVER AND ESCOUTCHEON
1 EA FLOOR STOP GLYNN-JOHNSON FB 15/16R FINISH 613
1 EA THRESHOLD PEMKO 172B DARK BRONZE ANODIZED
3 EA SILENCERS GLYNN-JOHNSON GJ65 FINISH BRONZE

DOOR SHCEDULE NOTES AND TYPES

ROOM FINISH SCHEDULE - BASEMENT FLOOR

NUMBER	TITLE	FLOOR MATL / FIN	BASE MATL / FIN	WAINSCOT MATL / FIN	NORTH MATL / FIN	EAST MATL / FIN	SOUTH MATL / FIN	WEST MATL / FIN	COLUMNS MATL / FIN	CEILING MATL / FIN	CEILING HGT.	REMARKS
B01	ELEVATOR EQUIPMENT ROOM	(E) / (E)	(E) / (E)	- / -	(E) / PTD	(E) / PTD	GB / PTD	GB / PTD	- / -	GB / PTD	(E)	
B02	ELEVATOR PIT	(E) / (E)	- / -	- / -	CMU / (E)	CMU / (E)	CMU / (E)	CMU / (E)	- / -	- / -	-	
-	-	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	-	

ROOM FINISH SCHEDULE - FIRST FLOOR

NUMBER	TITLE	FLOOR MATL / FIN	BASE MATL / FIN	WAINSCOT MATL / FIN	NORTH MATL / FIN	EAST MATL / FIN	SOUTH MATL / FIN	WEST MATL / FIN	COLUMNS MATL / FIN	CEILING MATL / FIN	CEILING HGT.	REMARKS
100	FOYER	TCT / FF	TCT / FF	- / -	(E) / PTD	(E) / PTD	PL/(E) / PTD	(E) / PTD	(E) / PTD	(E) / PTD	(E)	
101	ELEVATOR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	-	
102	INTERMEDIATE ELEV. LANDING	TCT / FF	TCT / FF	- / -	PL/(E) / PTD	PL / PTD	PL / PTD	PL/(E) / PTD	- / -	PL / PTD	14'-10"	
103	MEN'S RESTROOM	MT / FF	MT / FF	MT / FF	GB / PTD	GB/(E) / PTD	GB / PTD	(E) / PTD	- / -	GB/(E) / PTD	10'-0"	ALTERNATE BID - TILE WALL AND FLOOR FINISH
104	RESTROOM	CT / FF	CT / FF	CT / FF	GB / PTD	(E) / PTD	(E) / PTD	(E) / PTD	- / -	(E) / PTD	13'-6"	
105	CLOSET	CPT / FF	WD / STV	- / -	CMU / PTD	(E) / PTD	GB / PTD	GB / PTD	- / -	(E) / PTD	(E)	
106	WOMEN'S RESTROOM	MT / FF	MT / FF	MT / FF	GB/(E) / PTD	(E) / PTD	GB/(E) / PTD	GB/(E) / PTD	- / -	(E) / PTD	(E)	ALTERNATE BID - TILE WALL AND FLOOR FINISH
-	-	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -		

ROOM FINISH SCHEDULE - SECOND FLOOR

NUMBER	TITLE	FLOOR MATL / FIN	BASE MATL / FIN	WAINSCOT MATL / FIN	NORTH MATL / FIN	EAST MATL / FIN	SOUTH MATL / FIN	WEST MATL / FIN	COLUMNS MATL / FIN	CEILING MATL / FIN	CEILING HGT.	REMARKS
200	HALL	TCT / FF	TCT / FF	- / -	(E) / PTD	(E) / PTD	(E) / PTD	PL/(E) / PTD	(E) / PTD	(E) / PTD	12'-0"	PLASTER FINISH & TEXTURE TO MATCH EXISTING
201	ELEVATOR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	-	
202	OFFICE	CPT / FF	WD / STV	- / -	(E) / PTD	GB / PTD	(E) / PTD	(E) / PTD	- / -	(E) / PTD	9'-1"	
203	VESTIBULE	TCT / FF	TCT / FF	- / -	(E) / PTD	(E) / PTD	GB / PTD	GB / PTD	- / -	(E) / PTD	9'-1"	
204	OFFICE	CPT / FF	WD / STV	- / -	GB / PTD	(E) / PTD	(E) / PTD	(E) / PTD	- / -	GB/(E) / PTD	VARIES	
205	OFFICE	CPT / FF	WD / STV	- / -	(E) / PTD	(E) / PTD	GB / PTD	(E) / PTD	(E) / PTD	GB/(E) / PTD	VARIES	
-	-	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	-	

ROOM FINISH SCHEDULE - THIRD FLOOR

NUMBER	TITLE	FLOOR MATL / FIN	BASE MATL / FIN	WAINSCOT MATL / FIN	NORTH MATL / FIN	EAST MATL / FIN	SOUTH MATL / FIN	WEST MATL / FIN	COLUMNS MATL / FIN	CEILING MATL / FIN	CEILING HGT.	REMARKS
300	HALL	TCT / FF	TCT / FF	- / -	(E) / PTD	- / -	(E) / PTD	PL/(E) / PTD	(E) / PTD	(E) / PTD	9'-2"	PLASTER FINISH & TEXTURE TO MATCH EXISTING
301	ELEVATOR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	-	
302	HALL	CT / FF	CT / FF	- / -	GB / PTD	- / -	GB/(E) / PTD	(E) / PTD	(E) / PTD	CONC / PTD	9'-2"	
303	JANITOR ROOM	CONC / SEAL	WD / STD	- / -	(E) / PTD	GB / PTD	GB / PTD	(E) / PTD	- / -	(E) / PTD	9'-2"	-
304	RESTROOM	CT / FF	CT / FF	CT / FF	(E) / PTD	GB/(E) / PTD	GB / PTD	GB / PTD	- / -	(E) / PTD	(E)	
-	-	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -		

RESTROOM NOTE :

ALL NEW GYPSUM BOARD IN RESTROOMS WALLS AND CEILINGS SHALL BE USG "HUMITEK" BLUE BOARDS WITH PLASTER SKIM COAT AND PAINTED.
SEE SPECIFICATIONS FOR MORE INFORMATION.

ABBREVIATIONS

ACT ACOUSTIC TILE
CONC CONCRETE
CMU CONCRETE MASONRY UNIT
CPT CARPET
CT CERAMIC TILE
(E) EXISTING
FF FACTORY FINISH
GB GYP. BD.
GBW WATER RESISTANT GYP. BD.
MT MARBLE TILE
PL PLASTER
PT PAVER
PTD PAINTED (SEMI-GLOSS PAINT)
QT QUARRY TILE
RB RUBBER BASE
RT RUBBER TREAD
SAT SUSPENDED ACOUSTIC TILE
SC SOLID CORE W/HARD WOOD VENEER
SEAL SEALER/CLEAR
STV STAINED AND VARNISHED
TCT TERRA COTTA TILE
VCT VINYL COMPOSITION TILE
WD WOOD

GENERAL NOTES

1. PROVIDE 5/8" TYPE 'X' GYP. BD. TYPICAL THROUGHOUT, UNLESS OTHERWISE NOTED.
2. MOISTURE AND MOLD RESISTANT GYP. BD. TYPICAL, REQUIRED AT ALL RESTROOM LOCATIONS. USG SHEETROCK 'HUMITEK' GYPSUM PANELS "BLUEBOARD" OR EQUAL IS REQUIRED.
3. PLASTER SKIM COAT FINISH REQUIRED AT ALL GYP. BD. FINISH. FINISH TO BE SMOOTH TROWEL TEXTURE TO MATCH EXISTING WALL FINISHES.
4. BRUSH-OUTS/DRAW-DOWNS REQUIRED ON ALL PAINTS. FORWARD SAMPLES TO ARCHITECT FOR APPROVAL, PRIOR TO FINAL PAINT APPLICATIONS.

ROOM FINISH NOTES

MATERIAL FINISHES

CARPET
C-1 SHAWTEK CARPET-SCOOP-#19520, "AS IF"

WOOD BASE
WD-1 4" HIGH, PROFILE TO MATCH EXISTING BASE

MARBLE TILE
WALKER ZANGER - "TRIBECA" MOSAIC MARBLE TILE
FLOOR FIELD TILE: CLASSIC WHITE BASKET WEAVE
FLOOR PERIMETER BORDER: WHITE VENANTINO 12" x 12" TILE
WALL FIELD TILE: BRICK FIELD 2" x 8"
WALL BASE: BOULEVARD BASE MOLDING 5" x 12"
WALL MOLDING: MERCER MOLDING 2" x 12"

CERAMIC TILE: DALTILE
FLOOR FIELD TILE: DAL KEYSTONES, "PINWHEEL" PATTERN
T-1 # D317 WHITE 2" x 1"
T-2 # D311 EBONY 1" x 1"
WALL FIELD TILE: DAL RITTENHOUSE SQUARE
T-3 #0790 ARCTIC WHITE 6" x 3"
W/T-2 FEATURE STRIPE

TERRA COTTA TILE: MISSION TILE WEST
FLOOR FIELD TILE:
TC-1 # 132 LINCOLN 12" x 12" OCTAGON TILE
FLOOR BORDER TILE:
TC-2 #10 TERRA BELLA 6" x 12" TILE

COUNTERTOPS
WALKER ZANGER - WHITE VALANTINO MARBLE SLAB

PAINT
P-1 SHERWIN WILLIAMS-SEMI GLOSS

ROOM FINISHES

NOT USED | - | -

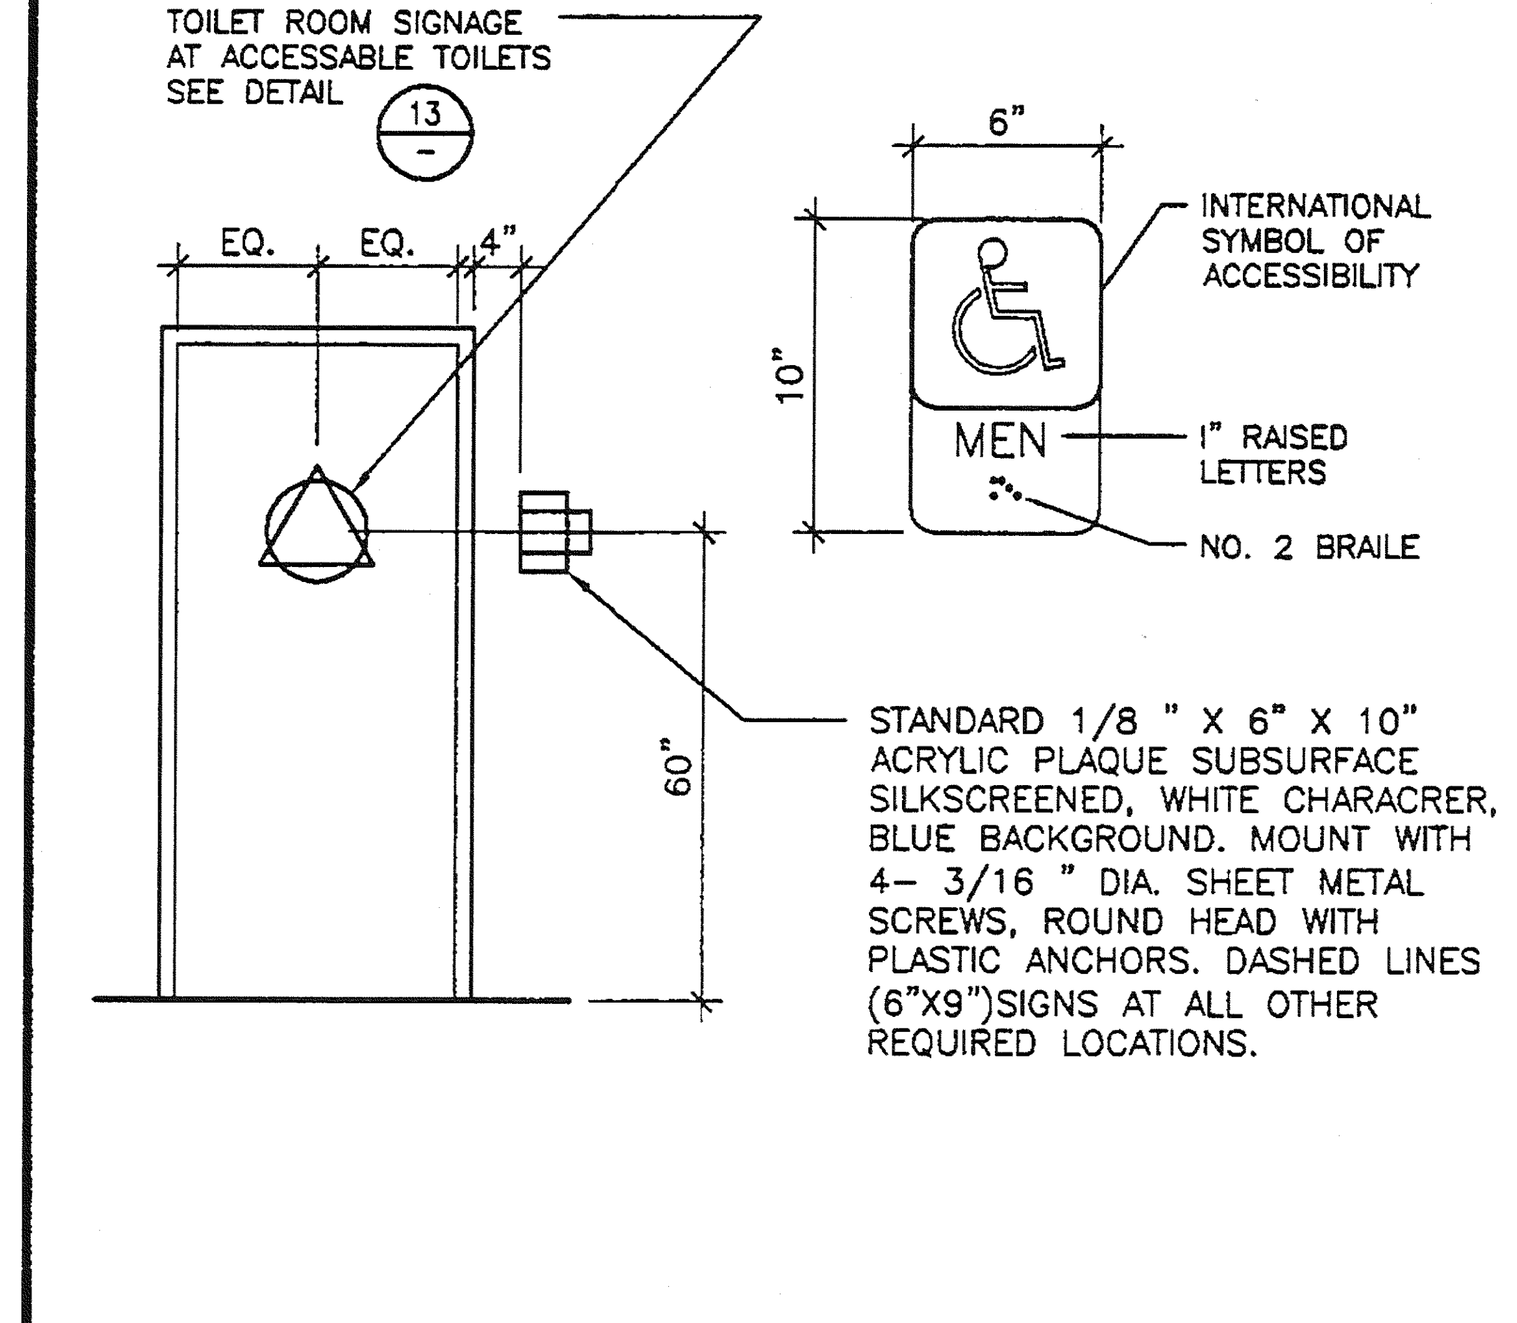

RESTROOM SIGNAGE | 3"=1'-0" | 6

NOT USED | - | -

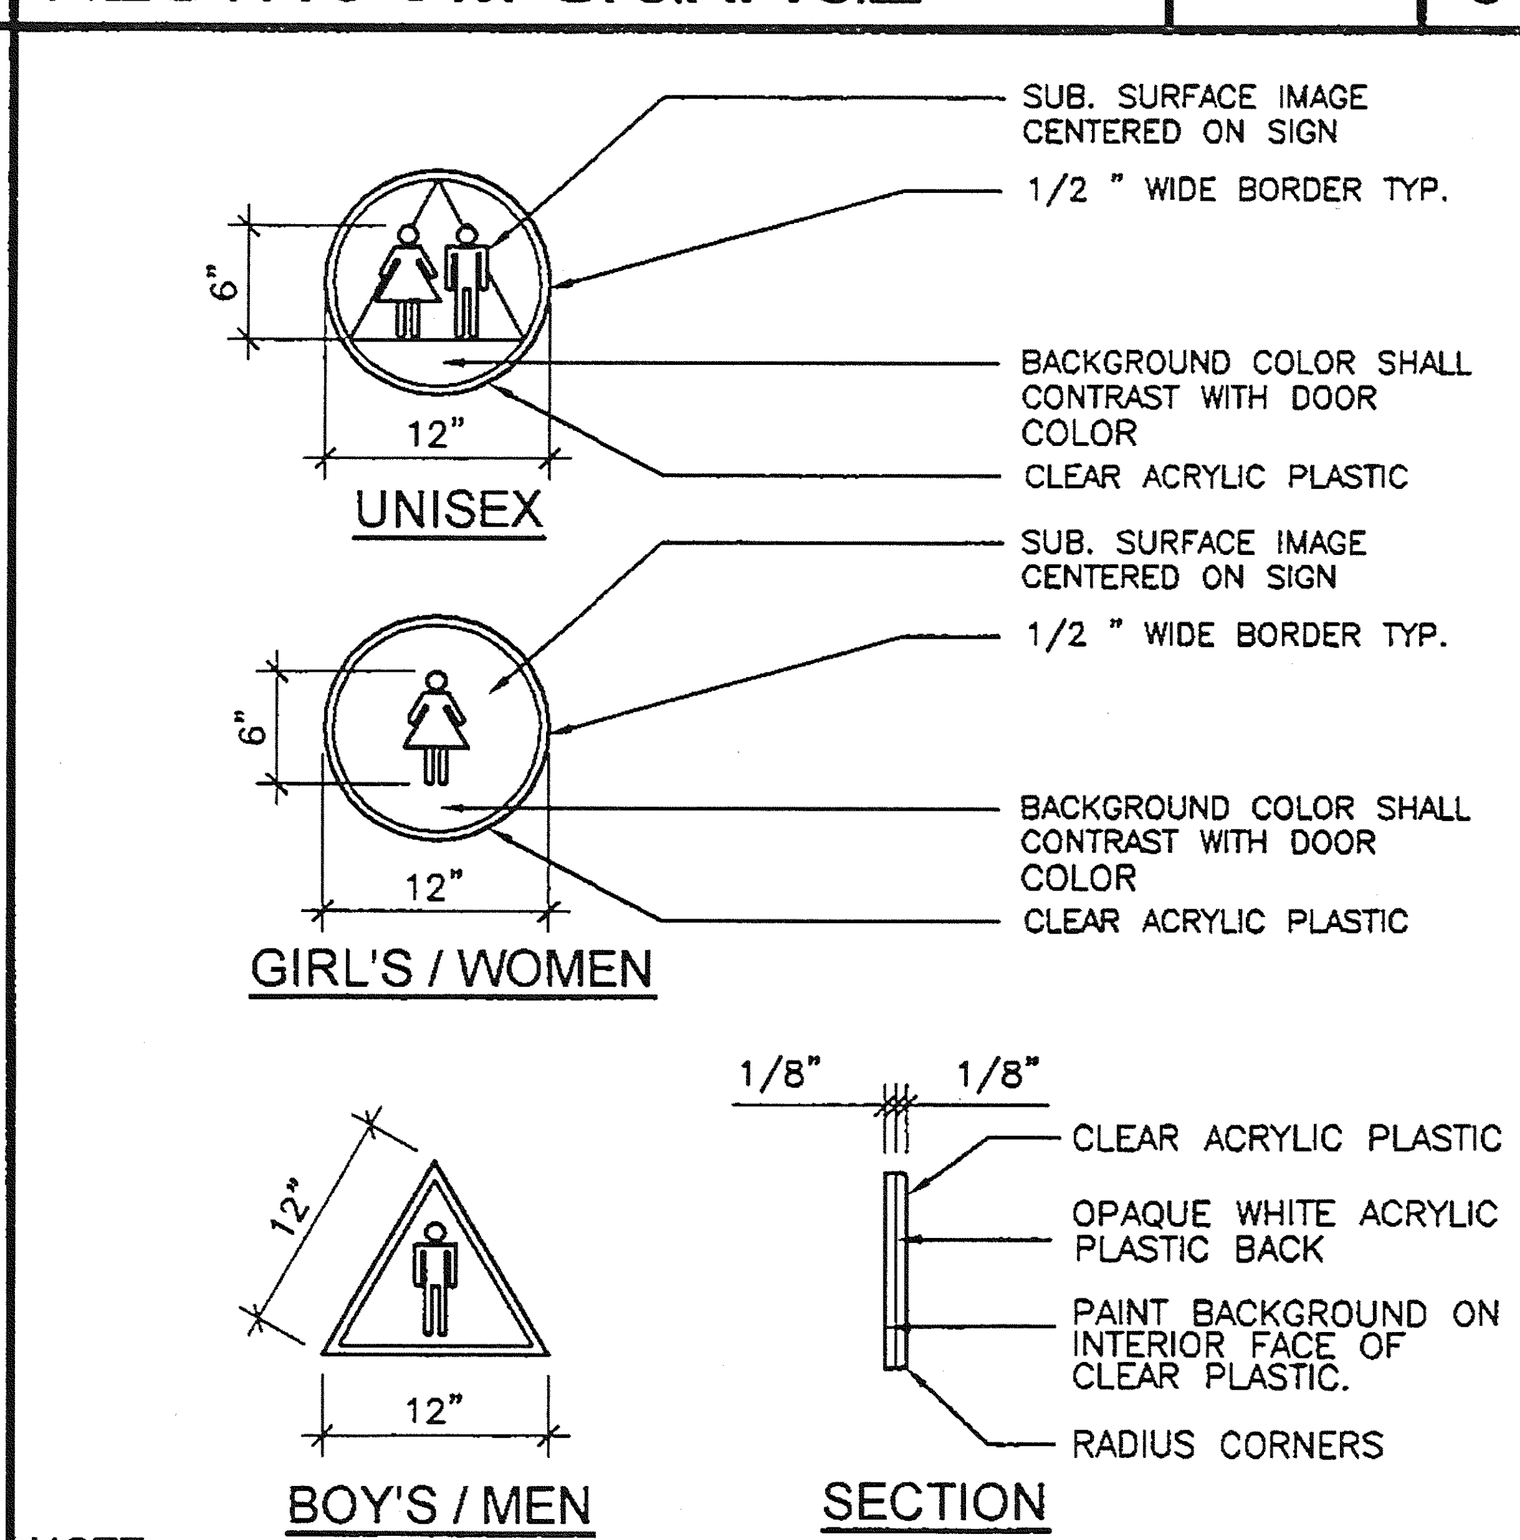

NOTE:
ATTACH SIGN USING (3) THREE FLATHEAD S.M. SCREWS, COUNTERSUNK, AND ADHESIVE. SIGN SHALL BE CENTERED ON DOOR AND MOUNTED 60" ABOVE FIN. FL. TO CENTERLINE OF SIGN.

RESTROOM DOOR SIGNAGE | N.T.S. | 5

NOT USED | - | -

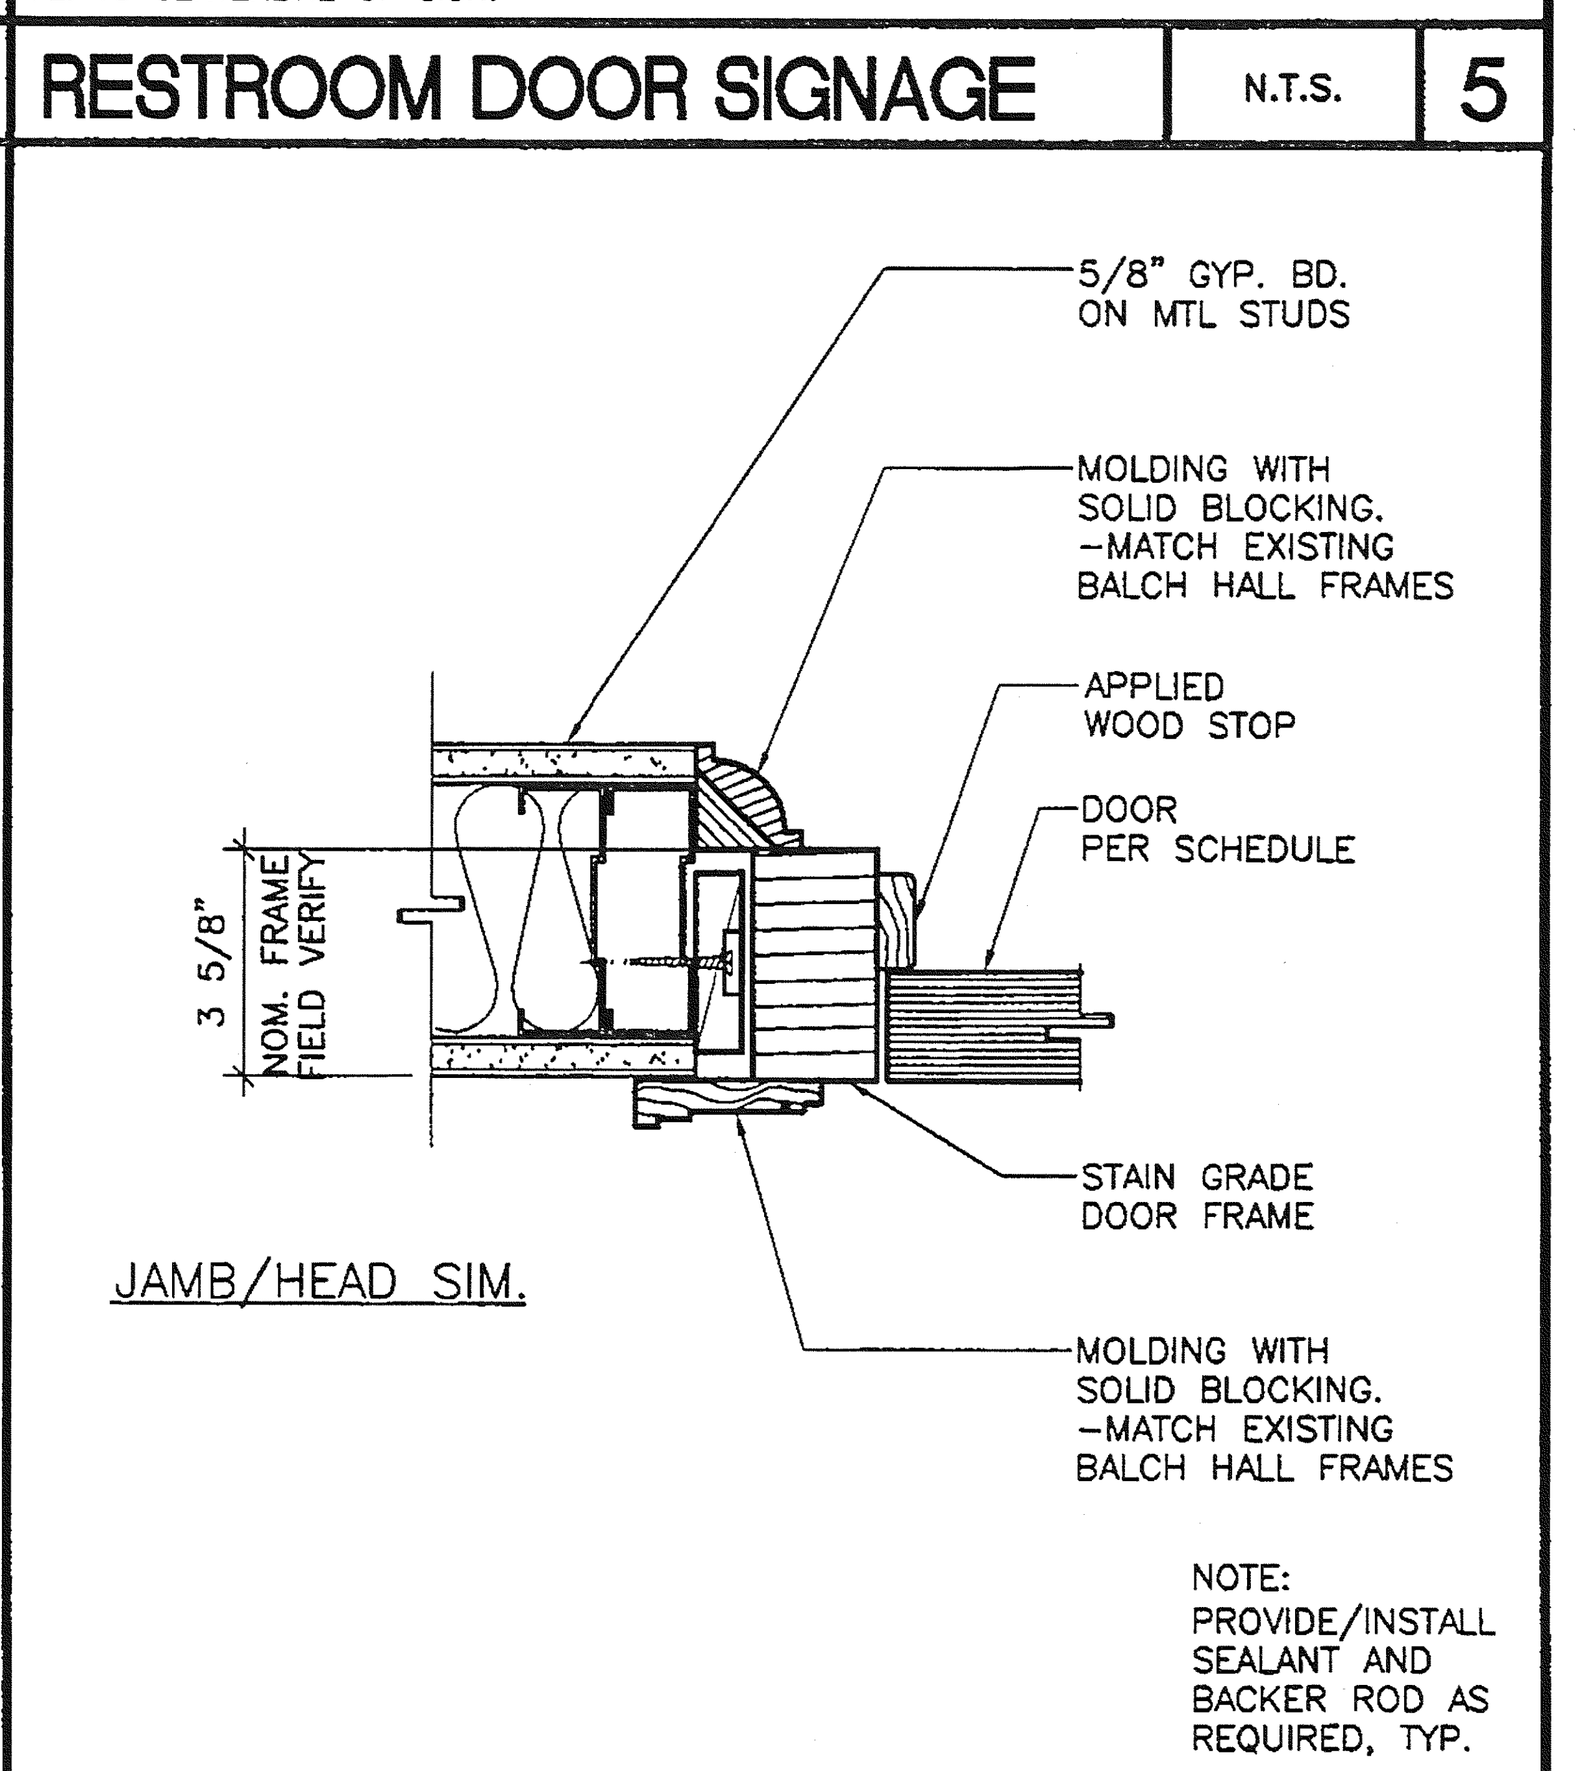

NOTE:
PROVIDE/INSTALL SEALANT AND BACKER ROD AS REQUIRED, TYP.

DOOR FRAME @ (N) WALL | 3"=1'-0" | 4

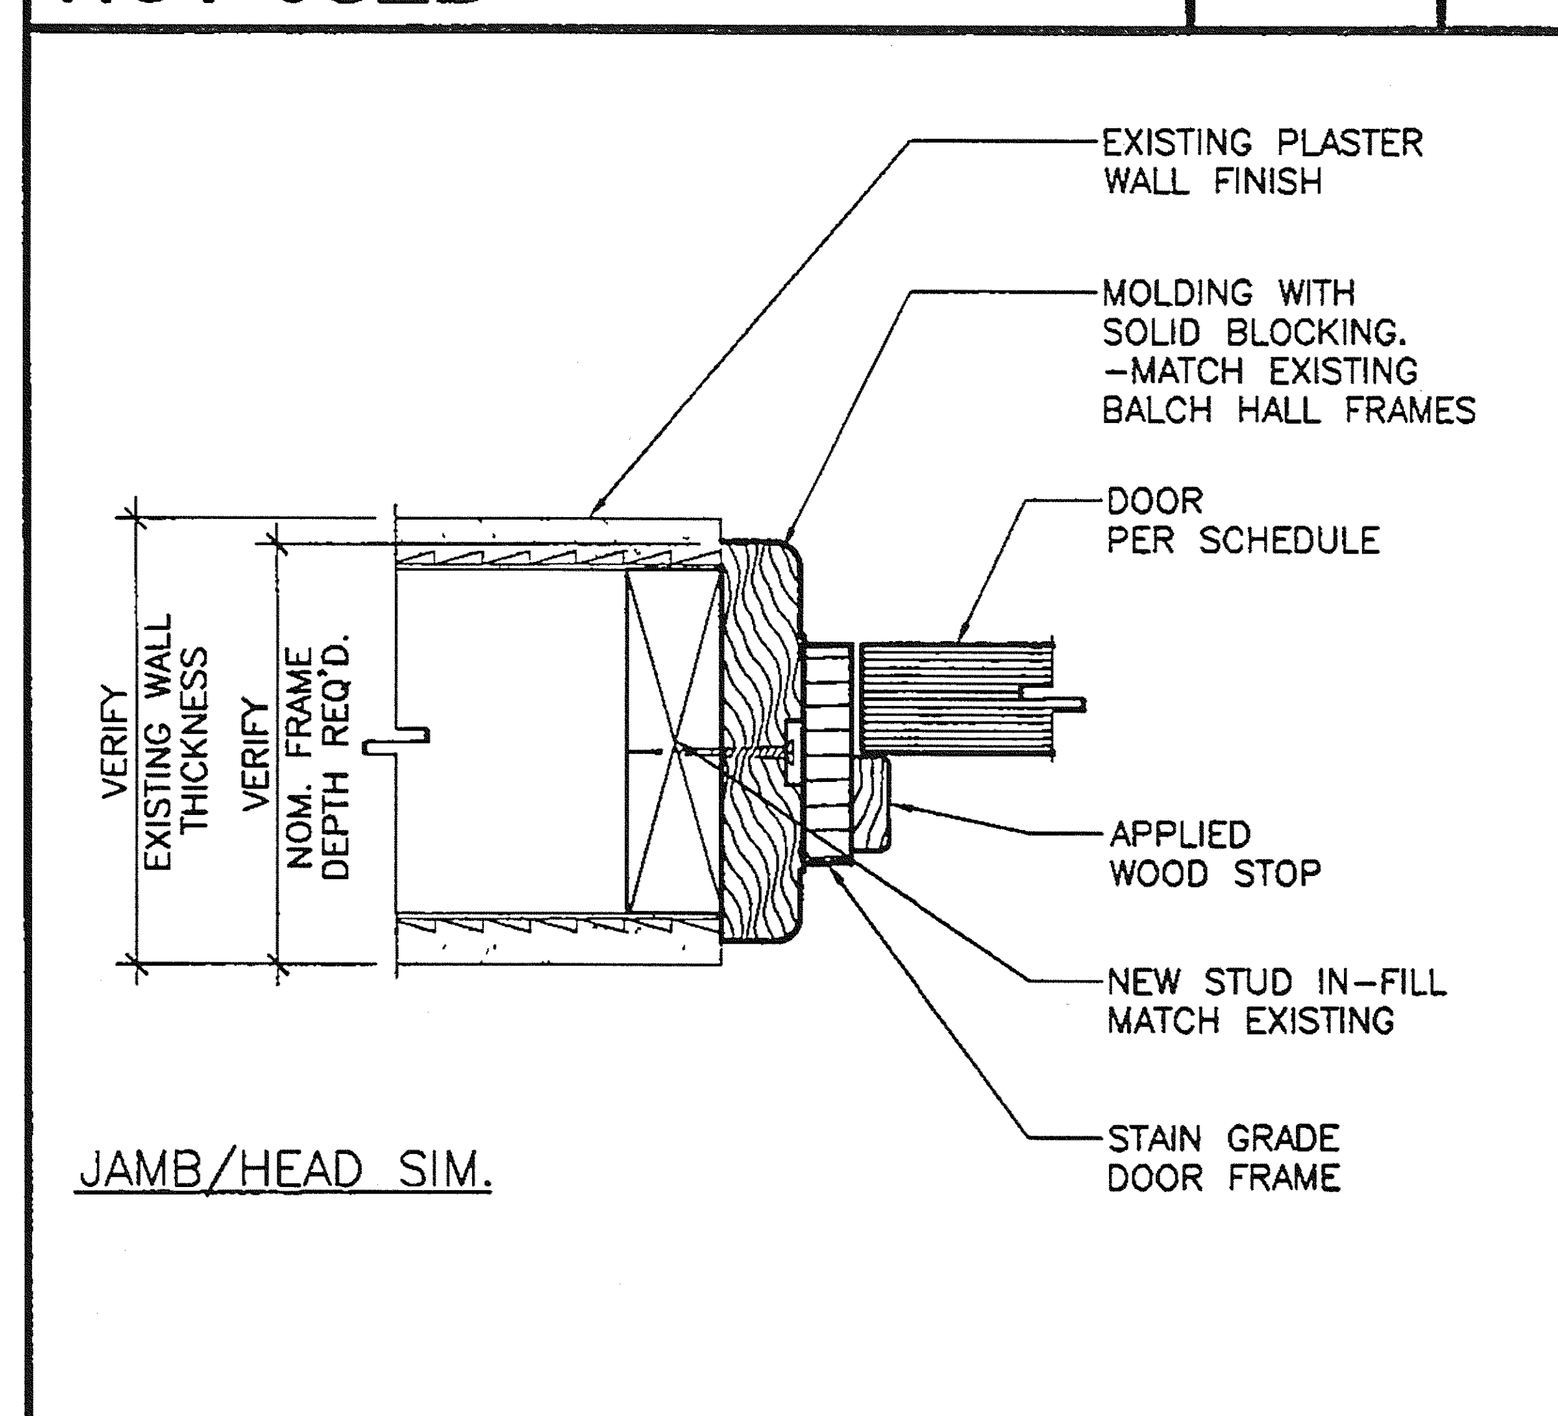

NOTE:
PROVIDE/INSTALL SEALANT AND BACKER ROD AS REQUIRED, TYP.

DOOR FRAME @ (E) WALL | 3"=1'-0" | 7

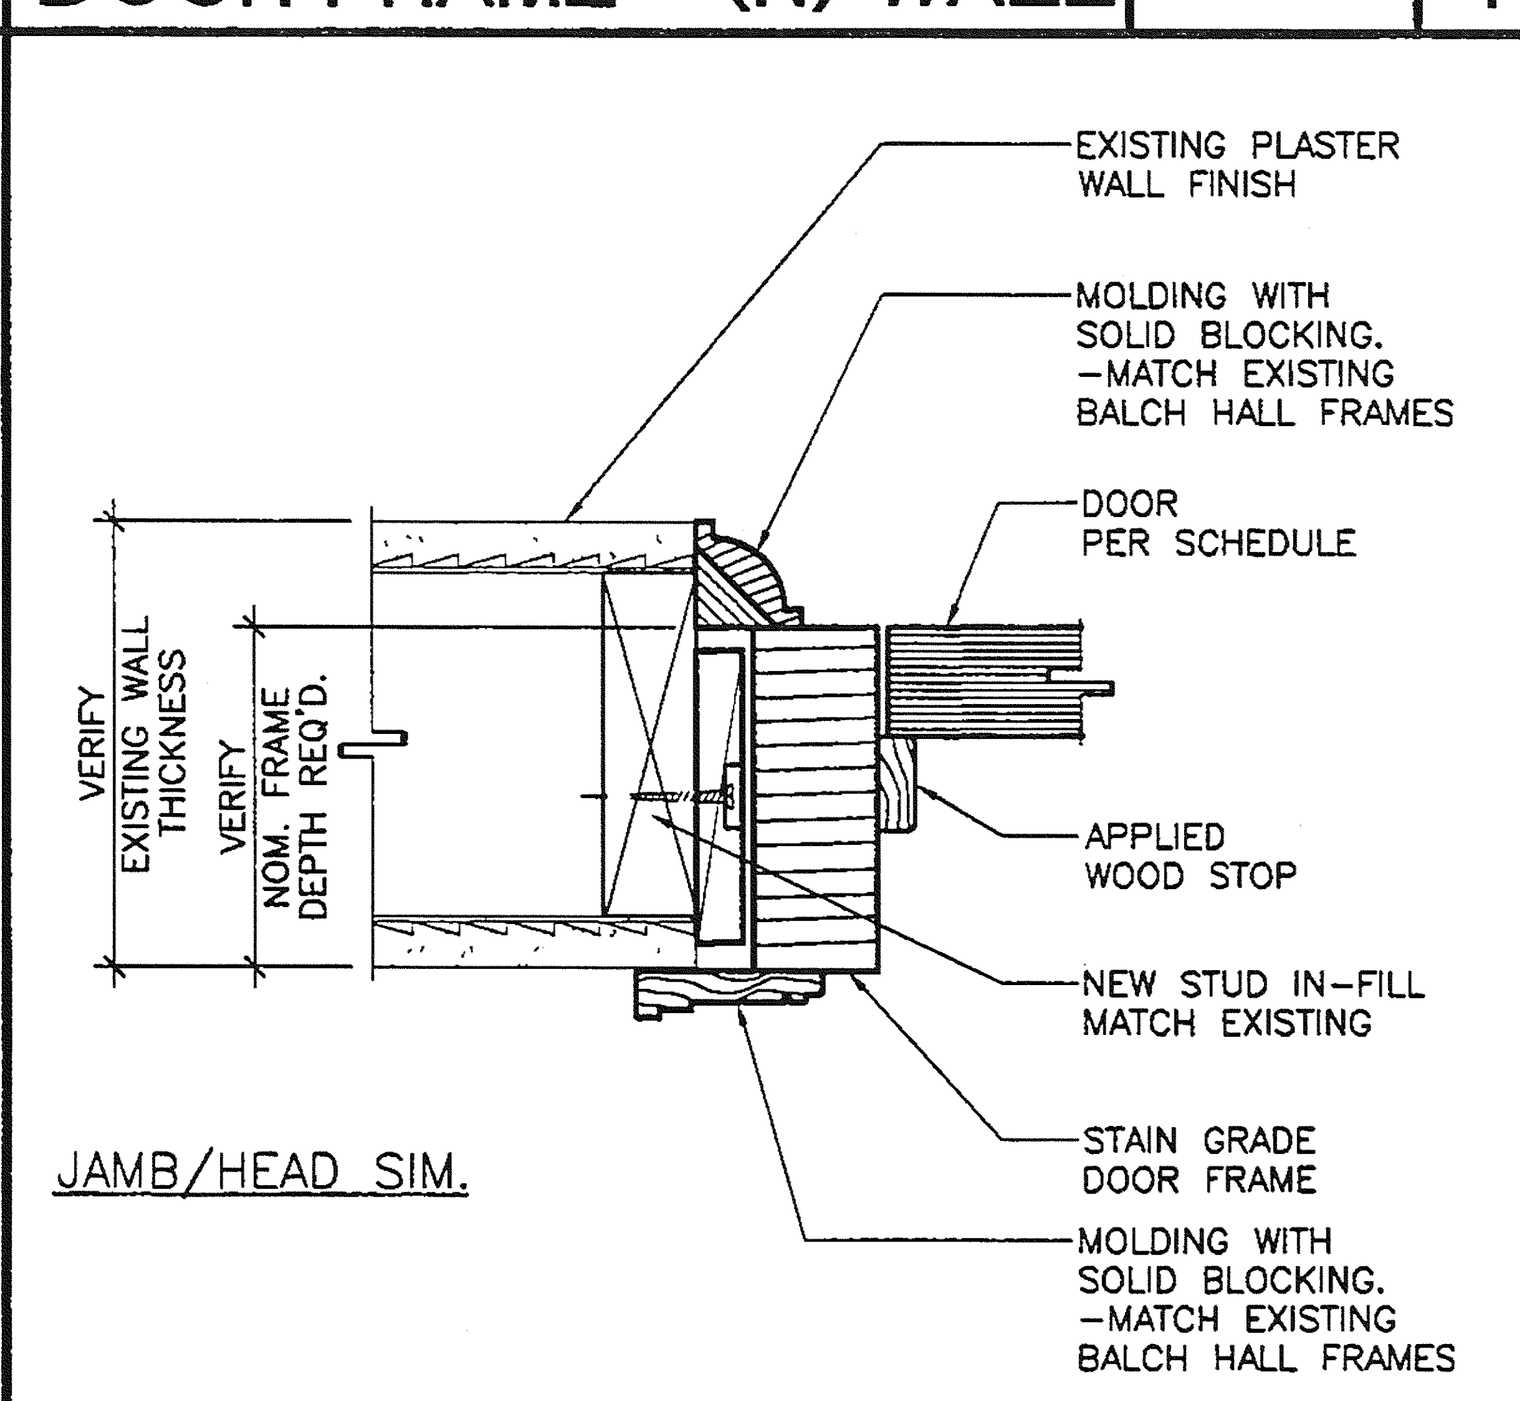

NOTE:
PROVIDE/INSTALL SEALANT AND BACKER ROD AS REQUIRED, TYP.

DOOR FRAME @ (E) WALL | 3"=1'-0" | 3

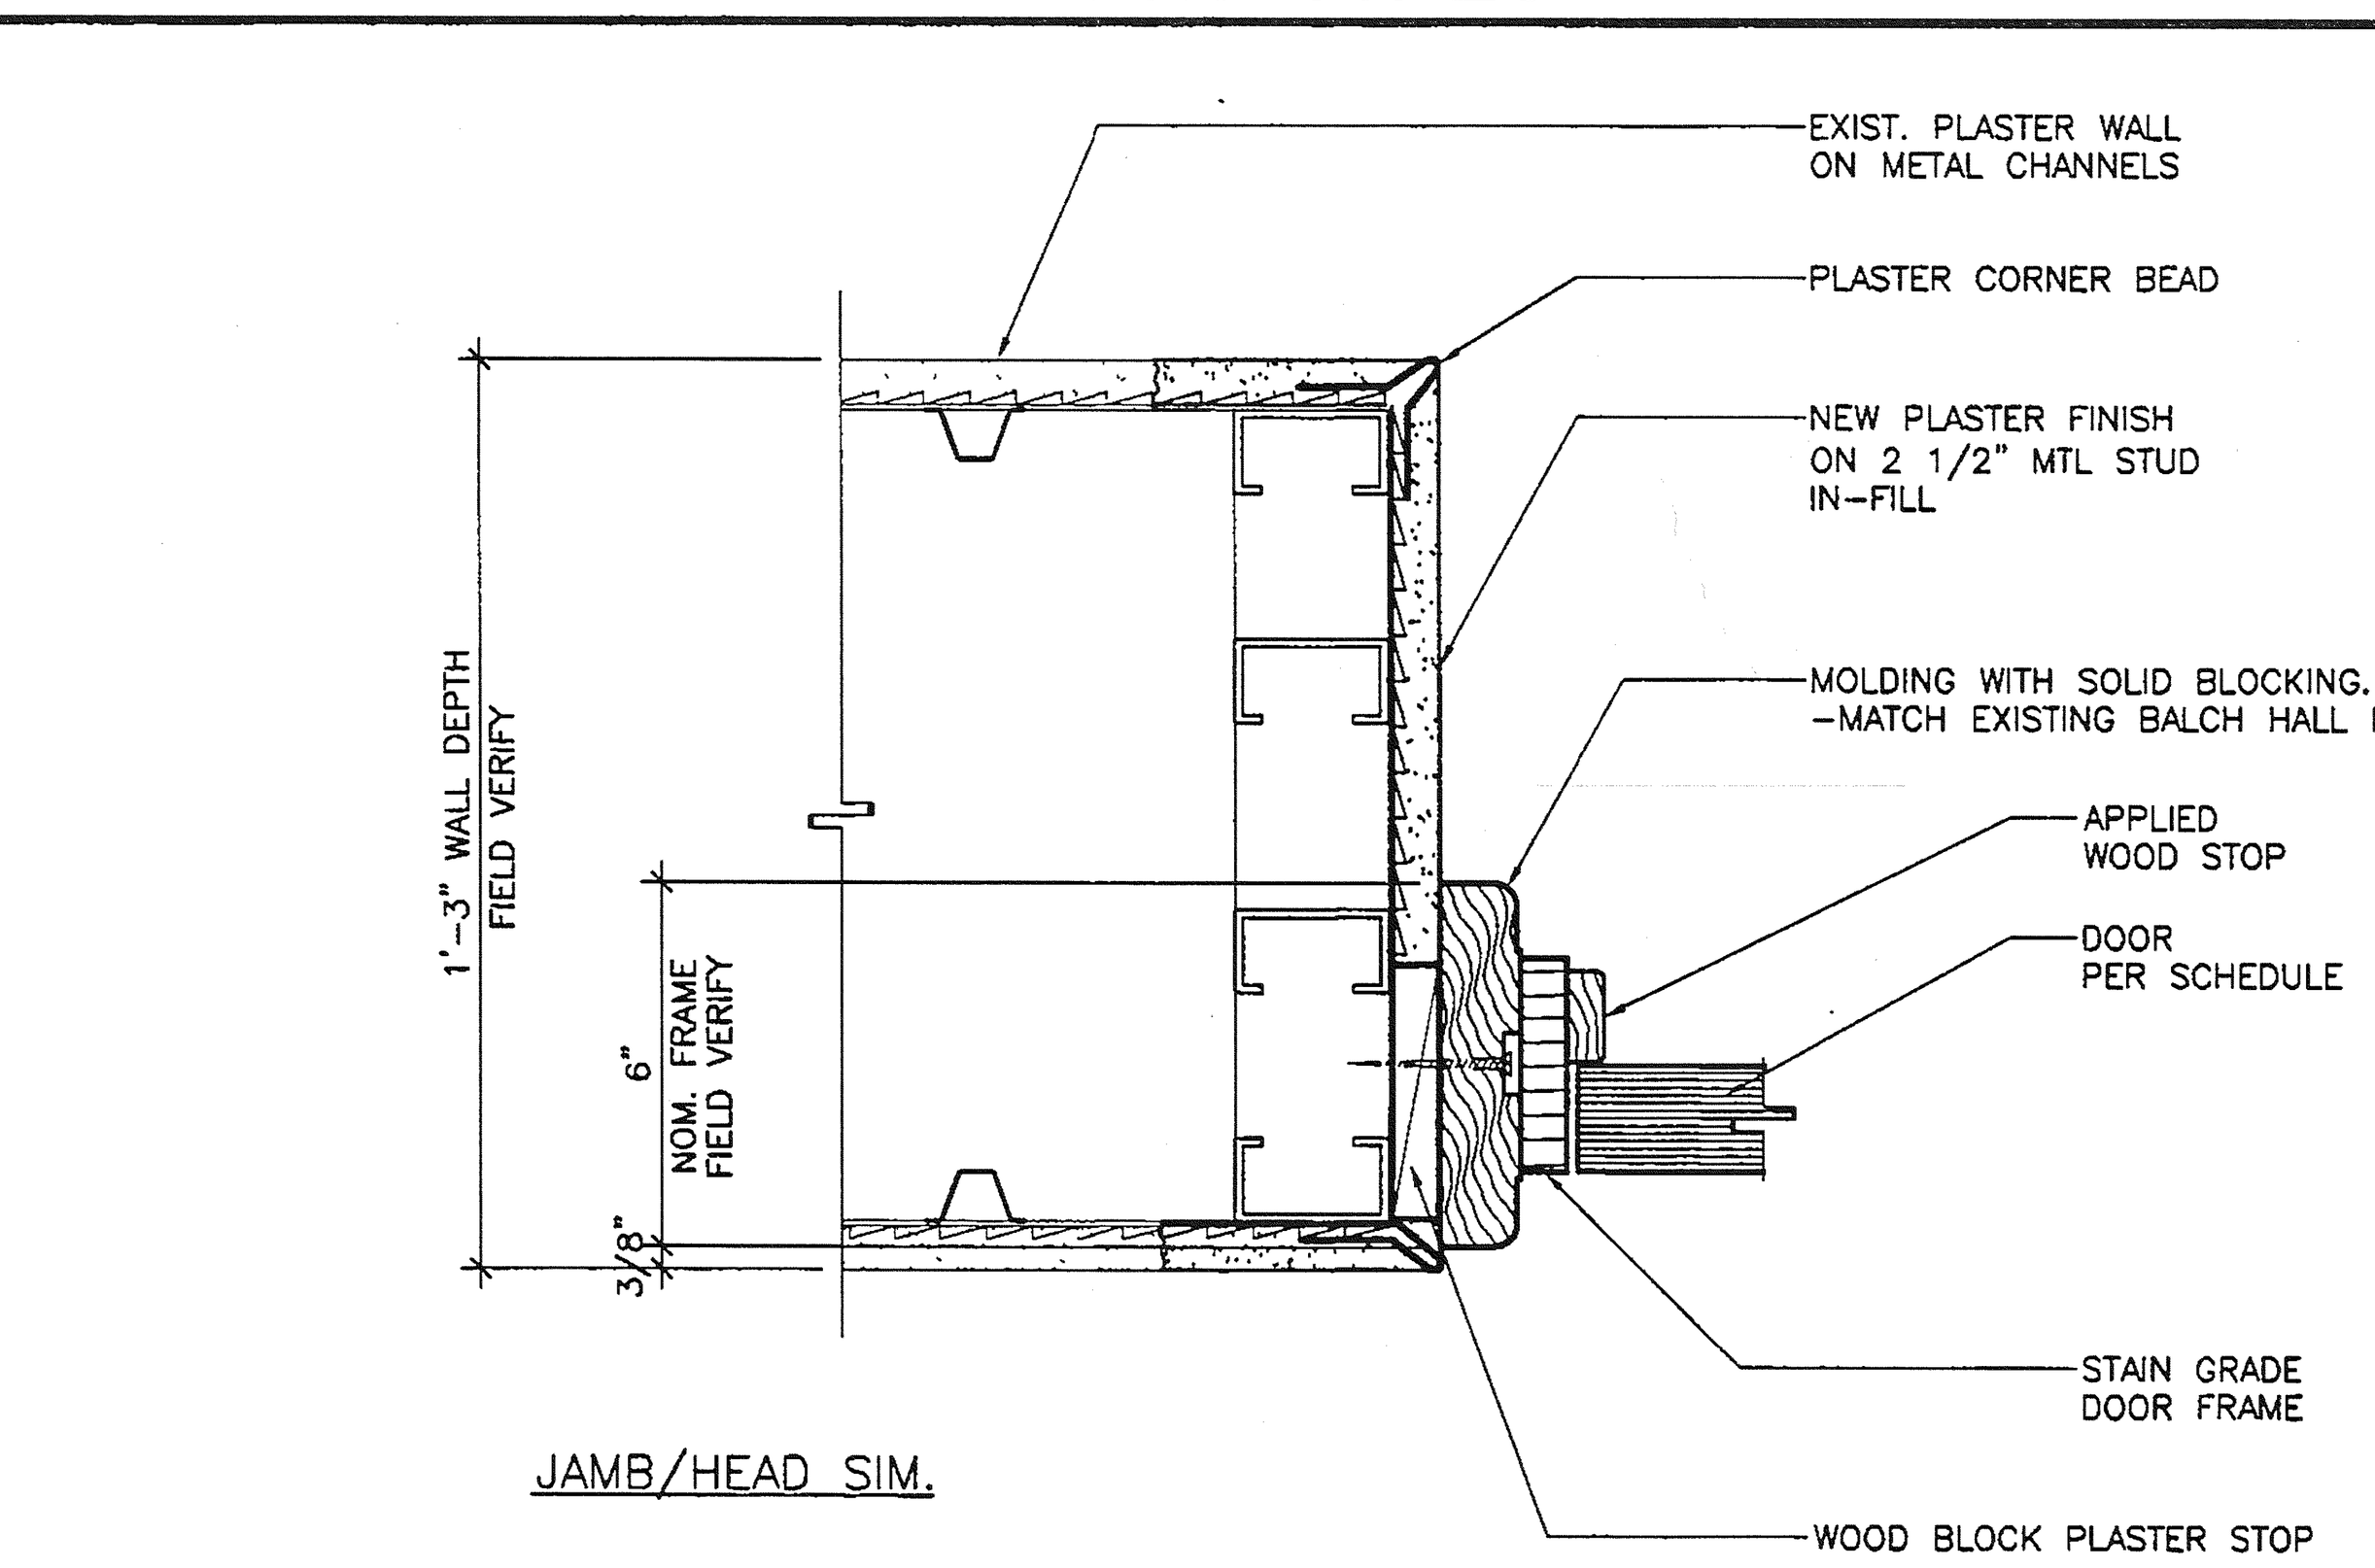

NOTE:
PROVIDE/INSTALL SEALANT AND BACKER ROD AS REQUIRED, TYP.

DOOR FRAME @ EXISTING PLASTER WALL | 3"=1'-0" | 1

SCRIPPS
THE WOMEN'S COLLEGE
• CLAREMONT •

PROJECT
SCRIPPS COLLEGE
BALCH HALL
ELEVATOR AND
RESTROOMS REMODEL

PROJECT LOCATION
1030 COLUMBIA AVENUE
CLAREMONT, CA 91711

ISSUANCES
02-21-07 PLAN CHECK SUBMITTAL
4 BID SET

REVISIONS

TITLE
DOOR
AND
ROOM FINISH
SCHEDULES

WEISER IRON
MAR 0 9 2007
RECEIVED

SCALE
AS NOTED
DATE
JANUARY 2006
JOB NO.
240906

A6.0